

## H-13 "THROUGH-HARDENED" HOTWORK EJECTOR PINS

TIGHTEST TOLERANCES IN THE INDUSTRY (.0003")

MATERIAL : H-13 HOTWORK DIE STEEL

CORE: THROUGH-HARDENED TO 50-55 RC


SURFACE: ION NITRIDED TO 65-74 RC

### STRAIGHT STYLE

FRACTIONAL AND .005" OVERSIZED DIAMETERS

TOLERANCES			
D	H	T	L
-.0005"	+.000"	+.000"	+.375"
-.0008"	-.010"	-.002"	-.000"

HOW TO ORDER: EXAMPLES			
Qty.	Cat No.	(IF .005" O.S.)	Length
24	RHX-13	+.005	L-10
48	RHX-9		L-10

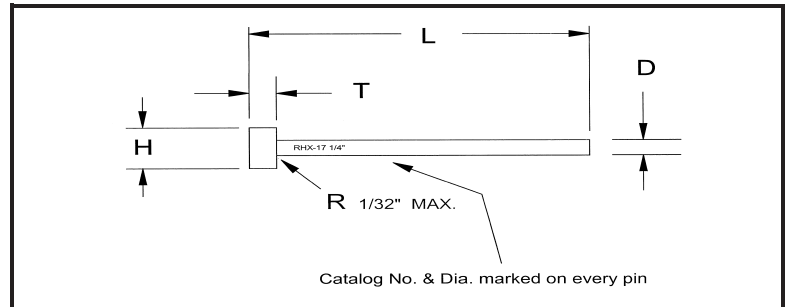

CATALOG NUMBER	D		H	T	NET PRICE EACH PER QUANTITY (US \$)					PKG. QTY.		
	PIN DIA.				HEAD DIA.	HEAD THICK.	L-6"	L-10"			L-14"	
	NOMINAL DIA.	DECIMAL EQUIV.					STANDARD DIA.	STANDARD DIA.	+.005" OVERSIZED DIA.		STANDARD DIA.	+.005" OVERSIZED DIA.
RHX-3	3/64	0.0469	1/4	1/8	4.30	Q	Q	Q	Q			
RHX-5	1/16	0.0625			4.05	4.75	5.30	Q	Q			
RHX-6	5/64	0.0781			4.05	4.75	5.30	Q	Q			
RHX-7	3/32	0.0938			3.65	4.10	4.85	Q	Q			
RHX-8	7/64	0.1094			3.65	4.10	4.85	Q	Q			
RHX-9	1/8	0.1250			1.95	2.15	2.25	2.50	2.80			
RHX-10	9/64	0.1406			2.15	2.35	3.15	3.05	Q			
RHX-11	5/32	0.1563	9/32	5/32	2.05	2.30	2.40	2.80	3.05			
RHX-12	11/64	0.1719	11/32	3/16	2.30	2.50	3.35	3.05	Q			
RHX-13	3/16	0.1875	3/8	3/16	2.10	2.45	2.55	3.10	3.30			
RHX-14	13/64	0.2031	3/8	3/16	2.55	2.70	Q	3.25	Q			
RHX-15	7/32	0.2188	13/32	3/16	2.30	2.70	2.95	3.35	Q			
RHX-16	15/64	0.2344	13/32	3/16	2.85	3.00	Q	3.70	Q			
RHX-17	1/4	0.2500	7/16	3/16	2.45	3.00	3.10	3.70	4.00			
RHX-18	17/64	0.2656	7/16	1/4	3.25	3.35	Q	4.05	Q			
RHX-19	9/32	0.2813	7/16	1/4	2.75	3.45	3.55	4.20	Q			
RHX-20	19/64	0.2969	1/2	1/4	3.65	3.80	Q	4.70	Q			
RHX-21	5/16	0.3125	1/2	1/4	3.05	3.80	3.90	4.75	5.25			
RHX-22	21/64	0.3281	9/16	1/4	4.00	4.20	Q	5.30	Q			
RHX-23	11/32	0.3438	9/16	1/4	3.40	4.30	4.55	5.50	Q			
RHX-24	23/64	0.3594	5/8	1/4	4.40	4.75	Q	5.95	Q			
RHX-25	3/8	0.3750	5/8	1/4	3.65	4.85	5.05	6.00	6.35			
RHX-26	25/64	0.3906	37/64	1/4	5.35	5.90	Q	Q	Q			
RHX-27	13/32	0.4063	11/16	1/4	4.00	5.30	5.70	6.90	Q			
RHX-28	27/64	0.4219	11/16	1/4	5.25	6.75	Q	Q	Q			
RHX-29	7/16	0.4375	11/16	1/4	4.35	5.90	6.15	7.60	8.40			
RHX-30	29/64	0.4531	45/64	1/4	5.70	7.05	Q	Q	Q			
RHX-31	15/32	0.4688	3/4	1/4	5.10	6.45	6.85	9.30	Q			
RHX-32	31/64	0.4844	3/4	1/4	6.20	8.15	Q	Q	Q			
RHX-33	1/2	0.5000	3/4	1/4	5.15	6.95	7.45	9.15	9.75			

12

Q = Price Per Quotation

QUANTITY DISCOUNTS		
Apply to all standard RHX Shoulder and Straight Styles, and are combinable with PT, RX, RC, RCX, MPT, and ME Ejector and Core Pins		
300 Pieces (one size).....Less 5%	500 Pieces (cumulative).....Less 5%	1200 Pieces (cumulative).....Less 7%