

RC AND RCX TYPES



STANDARD H-13 CORE PINS


3", 6" and 10" Lengths

TWO HARDNESS RANGES

STANDARD HARDNESS - RC TYPE: 30-35 RC

HIGH HARDNESS - RCX TYPE: 50-55-RC

RCX - Heads annealed

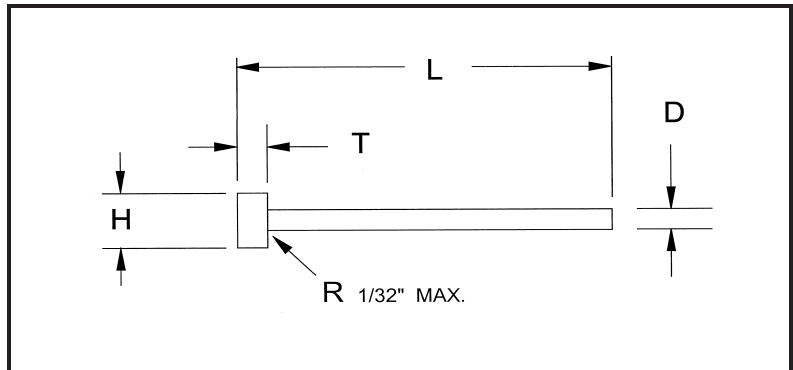

HOW TO ORDER: EXAMPLES		
QTY.	CAT NO.	LENGTH
24	RC-9	L-6
12	RCX-13	L-3

RC TYPE STANDARD HARDNESS 30-35 RC				D	H	T	RCX TYPE HIGH HARDNESS 50-55 RC				PKG. QTY.
CATALOG NUMBER	NET PRICE EACH (US \$)			BODY DIA.	HEAD DIA.	HEAD THICK.	CATALOG NUMBER	NET PRICE EACH (US \$)			
	STANDARD LENGTHS							STANDARD LENGTHS			
	L-3"	L-6"	L-10"					L-3"	L-6"	L-10"	
RC-3	4.90	5.51	Q	3/64	1/4	1/8	RCX-3	5.10	5.76	Q	12
RC-5	4.64	5.15	Q	1/16	1/4	1/8	RCX-5	4.85	5.41	Q	
RC-6	4.23	4.64	Q	5/64	1/4	1/8	RCX-6	4.44	4.90	Q	
RC-7	3.62	3.72	4.34	3/32	1/4	1/8	RCX-7	3.83	3.98	4.69	
RC-8	3.72	3.88	4.59	7/64	1/4	1/8	RCX-8	3.93	4.08	4.90	
RC-9	2.24	2.30	3.06	1/8	1/4	1/8	RCX-9	2.40	2.50	3.21	
RC-10	2.24	2.35	3.06	9/64	1/4	1/8	RCX-10	2.40	2.60	3.21	
RC-11	2.30	2.40	3.11	5/32	9/32	5/32	RCX-11	2.50	2.60	3.21	
RC-12	2.30	2.40	3.21	11/64	11/32	3/16	RCX-12	2.55	2.65	3.42	
RC-13	2.35	2.45	3.26	3/16	3/8	3/16	RCX-13	2.55	2.70	3.42	
RC-14	2.40	2.50	3.32	13/64	3/8	3/16	RCX-14	2.60	2.75	3.57	
RC-15	2.45	2.60	3.42	7/32	13/32	3/16	RCX-15	2.65	2.81	3.57	
RC-16	3.42	3.98	Q	15/64	13/32	3/16	RCX-16	3.62	4.23	Q	
RC-17	2.65	2.75	3.67	1/4	7/16	3/16	RCX-17	2.86	3.01	3.88	
RC-18	3.67	4.23	Q	17/64	7/16	1/4	RCX-18	3.93	4.54	Q	
RC-19	2.91	3.01	4.03	9/32	7/16	1/4	RCX-19	3.16	3.32	4.34	
RC-20	3.98	4.54	Q	19/64	1/2	1/4	RCX-20	4.23	4.85	Q	
RC-21	3.21	3.32	4.44	5/16	1/2	1/4	RCX-21	3.47	3.62	4.79	
RC-22	4.23	4.85	Q	21/64	9/16	1/4	RCX-22	4.54	5.20	Q	
RC-23	3.47	3.62	4.79	11/32	9/16	1/4	RCX-23	3.77	3.98	5.30	
RC-24	4.64	5.25	Q	23/64	5/8	1/4	RCX-24	4.90	5.61	Q	
RC-25	3.88	4.03	5.30	3/8	5/8	1/4	RCX-25	4.13	4.39	5.81	
RC-27	4.34	4.54	5.76	13/32	11/16	1/4	RCX-27	4.64	4.95	6.32	
RC-29	4.69	4.85	6.32	7/16	11/16	1/4	RCX-29	5.00	5.20	6.94	
RC-31	5.20	5.41	6.89	15/32	3/4	1/4	RCX-31	5.56	5.97	7.60	
RC-33	5.56	5.76	7.40	1/2	3/4	1/4	RCX-33	5.87	6.27	8.21	
RC-35	Q	6.89	9.18	9/16	13/16	1/4	RCX-35	Q	7.50	10.00	
RC-37	Q	8.21	10.76	5/8	7/8	1/4	RCX-37	Q	8.77	11.88	
RC-39	Q	13.26	Q	11/16	15/16	1/4	RCX-39	Q	14.18	Q	
RC-41	Q	11.12	14.69	3/4	1	1/4	RCX-41	Q	12.09	16.32	

TOLERANCES		
D	PIN DIA.	+0.001" -.000"
H	HEAD DIA.	+0.000" -.010"
T	HEAD THICK.	+0.000" -.002"
L	OVERALL LENGTH	+0.375" -.000"

QUANTITY DISCOUNTS	
Based on one shipment and one destination	
Combinable with PT, RX, ME, RHX, and MPT Ejector pins.	
300 Pcs. (one size)...Less 5%	
500 Pcs. (cumulative)...Less 5%	
1200 Pcs. (cumulative)...Less 7%	

* Decimal diameters can be made to order for prompt delivery. Also, please refer to pages 2, 3, 4, 5, & 6 for core pin blanks stocked in .001" increments from 0.010" diameter.

Q = Price Per Quotation

Please see PAGE 1 for a complete list of modifications that are available for any of the ROYAL Family of Pins and Punches